




Drill Stands

New

The little strong professional tripod
Fleika KF 160

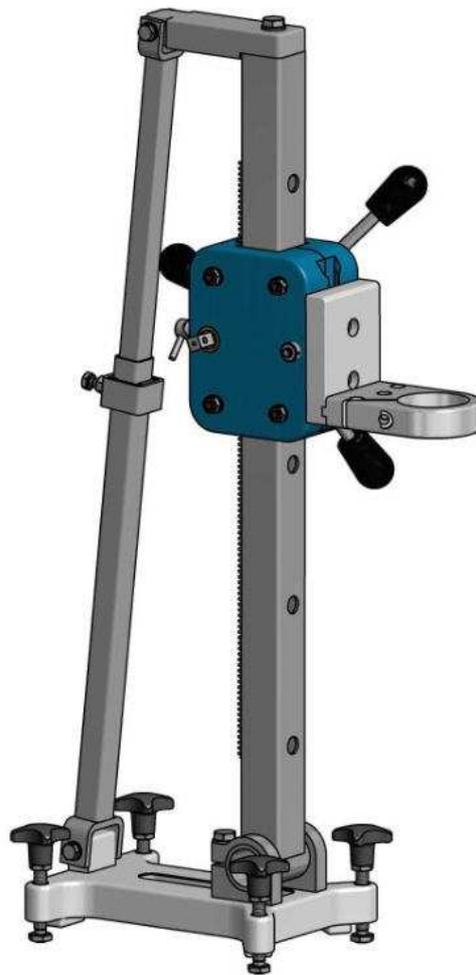

available from November 2, 2015

Fleika Maschinen und Anlagenbau GmbH Co. KG

Koblberg 1, D-83564 Soyen, Sales: Alois Blüml, Tel: 0049-8071-103228 – Fax: 0049-8071-103256


The original by



The professional drilling stand for pros

In addition to the known and proven Fleika drill stand - the original Fleika-drill for concrete drilling professionals in sizes of KF 250 - KF 400 - 600 KF - KF 700 and KF 1000 there is now the new small professional drill stand -

Fleika KF 160

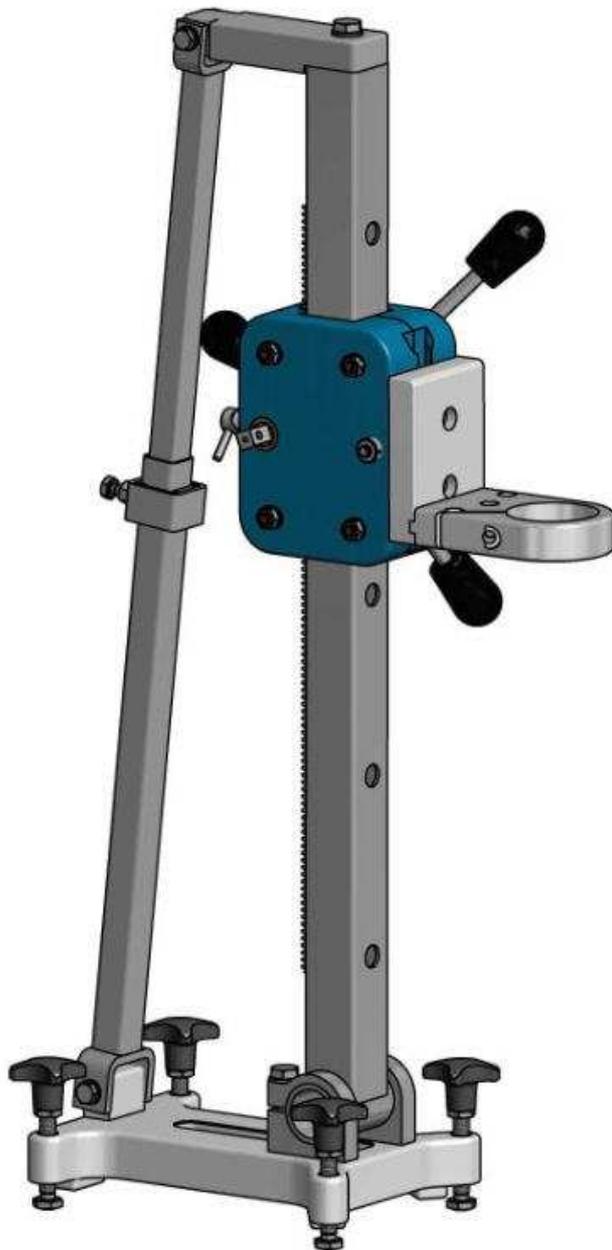

Due to its light weight and small size of the drill stand **Fleika KF 160** is the drill bit to the user a great relief. Its stability and structure, which was built with the 30-year drilling and development work of the company FLEIKA, now our customers will significantly by fast and time-saving drilling to Good.


With his coma pact awareness, absolute robustness and high reliability of **Fleika KF 160** is a particularly suitable device for professional craftsmen from the trades Heating - Plumbing - Electrical - Ventilation - Locksmithing and much more.

Fleika Maschinen und Anlagenbau GmbH Co. KG

Koblberg 1, D-83564 Soyen, Sales: Alois Blüml, Tel: 0049-8071-103228 – Fax: 0049-8071-103256

The **Fleika KF 160** is distinguished by primarily from:

1. The aluminum housing: compact and very robust.
2. Its proven integrated quick-change system is designed to accommodate the clamping neck adapter and drilling motor plate. These are inserted from the top by means of a dovetail guide.
3. The motor can be switched on in every corner and be removed to unscrew without the tripod - a special development of **Fleika**.

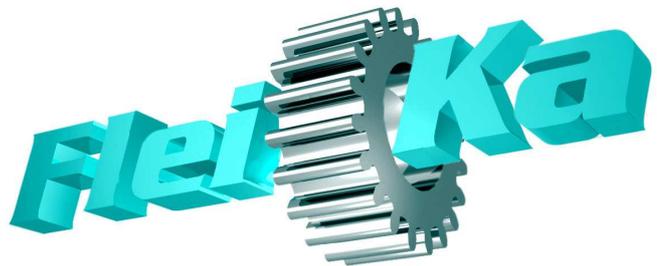

4. Each of the 8 roles is doubly supported by the Fleika patent and thus the entire housing supported a total 16 times.

5. With the newly developed easily accessible feed locking system is a slight stop and solve the feed housing possible.
6. The crank is to change smoothly with the quick-change system on the drive shaft from left to right.
7. The guide column is made of stainless steel. Its rounded corners allow easy handling and effortless cleaning.
8. Both joint clamps made of stainless steel make it possible to adjust the drilling angle forward 30 °, backwards 60 °.

9. In the support is at the attachment to the column a handle body incorporates a specially developed by FLEIKA clamp allows for infinitely variable adjustment of the drilling angle when inclined holes.
10. With the foot console of a high quality and reliable light aluminum alloy, the basic stability of the stand is secured.
11. All four screws of the foot console are self-cleaning and equipped with proven handy aluminum cross handles.

The drill stand **Fleika KF 160** is ideal for holes up to 160mm diameter in the plumbing, heating, locksmithing and electrical sector.

The technical data:

bore diameter	10-160 mm
slide feed travel	520 mm
dolumn length	700 mm
dimensions length	250 mm
dimension width	180 mm
dimensions overall height	800 mm
weight with collar	11.5 kg
motor power max.	2.3 KW
slide travel / crank revolution	65 mm
gear ratio	1: 14
inclination forwards and backwards	f 30 °-b 60 °